


WF Seat Runners

Lay out all components as shown in image 1



Slide runner down to allow access to rear bolt hole and offer runner to seat as shown in image 2

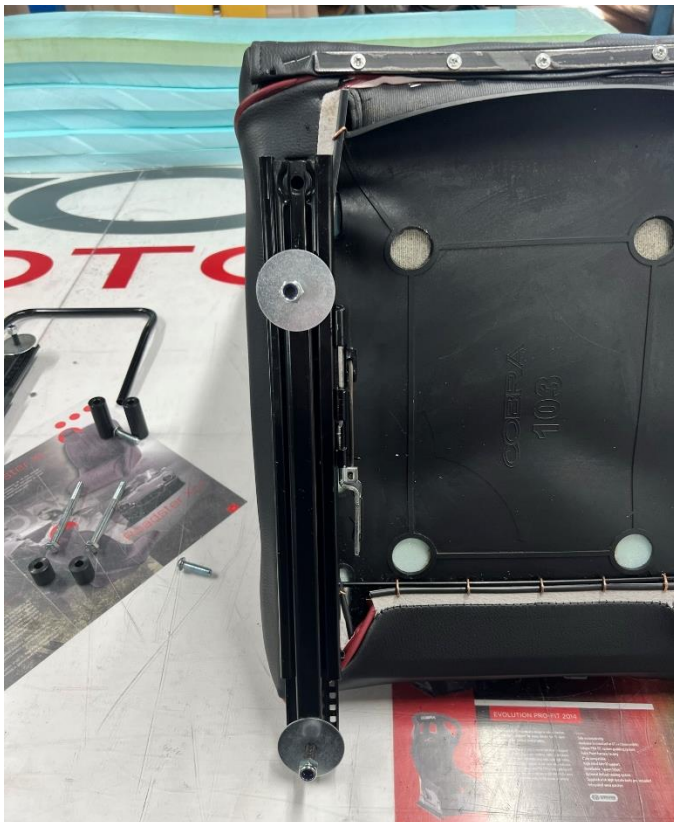

Use cap head bolt to fix runner to seat at rear bolt hole as shown in image 3



Repeat for the other runner as shown in image 4



Flip seat over to face up and slide runners back to allow access to front bolt holes. Insert spacers in the gap as shown in image 5



Insert the long hex head bolt through the runner and spacer and tighten as shown as in image 6



Slide runner handle onto the runner clips as shown in image 7 and 8

