




### KIT CONTENTS




☐ 10" HIGH POWER  
SUCTION FAN  
Part No. FAN0193HP  
x1




☐ UPPER FAN  
BRACKET  
Part No. 130227  
x1



☐ LOWER FAN  
BRACKET  
Part No. 130228  
x1



M6 Nyloc Nut  
x4



M6 Washer Form A  
(Small Diameter)  
x4



M6 NUT KIT KIT  
Part No. 140013  
x1 Kit


☐ RTB-2 CONNECTOR  
Part No. 140064  
x1 Kit

SIGNED OFF BY: \_\_\_\_\_ DATE: \_\_\_\_\_

### FUSE SIZING


To prevent damage if a cooling fan gets blocked, the circuit powering the fan needs a time-delay type fuse with the correct amperage rating.  
This installation uses 1x suction fan - part number FAN0193HP (F31P-12E8102-13B).  
The nominal running current is 12 amps.

### STEP 1

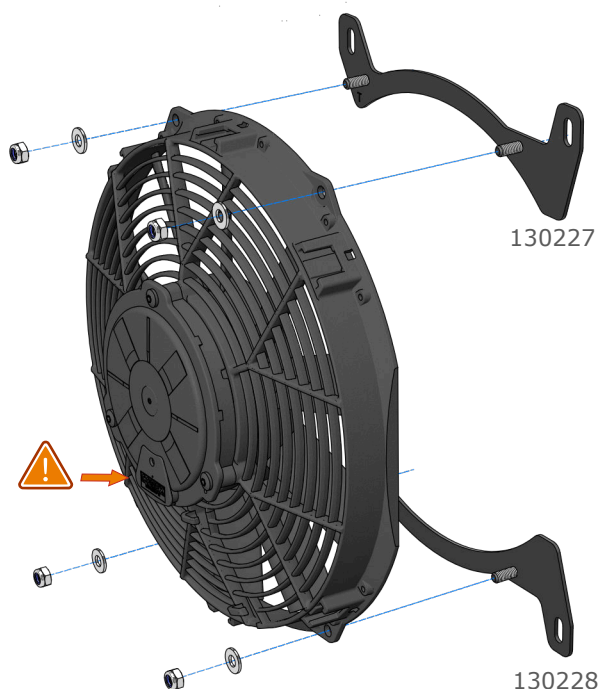

Attach the fan to the upper and lower brackets using the washers and nyloc nuts supplied (as shown above). Note brackets are denoted by their respective 'T' and 'B' symbols cut through the part. Note the fan orientation.

### STEP 2

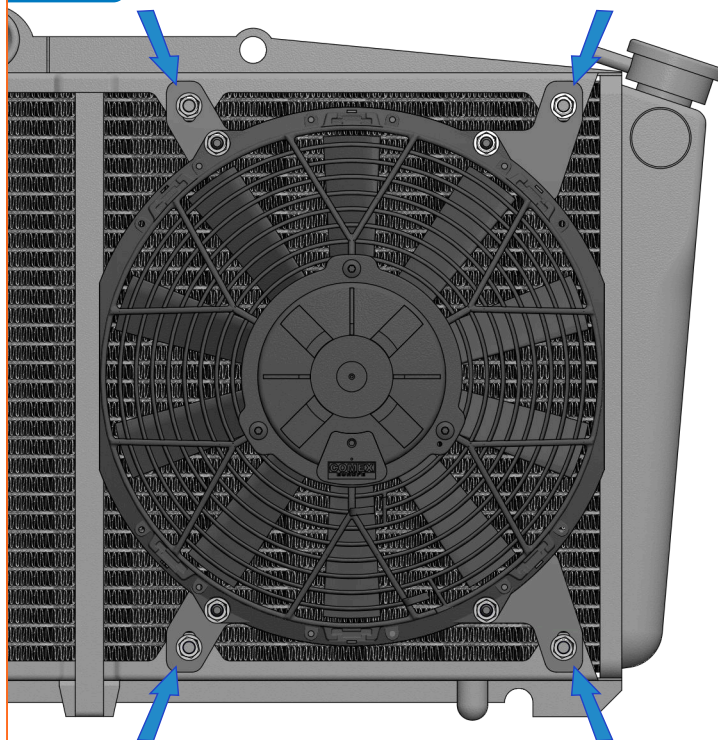

Using the original fan fixings, secure the assembly to the top and bottom of the radiator (4x positions). Ensure the fan is free-spinning and that the assembly is not twisted. Check there is a uniform gap around the fan blades.  
Connect the fan to the vehicle using the supplied earth kit.

### IMPORTANT NOTES

This Revotec cooling kit has been engineered to provide perfect cooling for the Alfetta GTV Series 1. However it is essential that the other components in the cooling system are operating correctly. The following must be checked:

1. The radiator has a normal life expectancy of approximately 8-9 years, after this time it should be thoroughly assessed and any signs of deterioration, such as furring up internally or distortion, a replacement is recommended.
2. The radiator fins must be clear of all debris such as mud and leaves.
3. The system must be filled with the correct coolant.
4. The water pump and thermostat must be operating correctly.

Installations are to be undertaken by a competent vehicle mechanic. If in doubt, consult a qualified professional.  
Always work in a safe environment and wear PPE where necessary. Disconnect the vehicle battery before beginning installation.  
Failure to comply with the above may result in your warranty being void.