


VERY IMPORTANT NOTE

This Revotec cooling kit has been engineered to provide perfect cooling for your MGB. However it is essential that the other components in the cooling system are operating correctly.

The following must be checked:

1. The radiator has a normal life expectancy of approximately 8-9 years, after this time it should be thoroughly assessed and any signs of deterioration, such as furring up internally or distortion, a replacement is recommended.
2. The radiator fins must be clear of all debris such as mud and leaves.
3. The system must be filled with the correct coolant.
4. The water pump and thermostat must be operating correctly.

Fig. 1

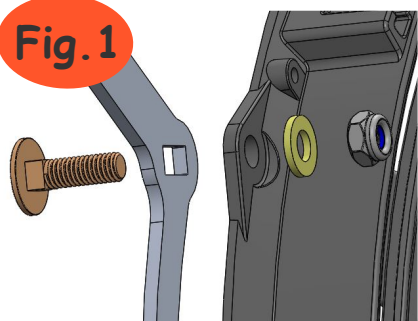

1. Loosely Assemble the fan and bracket assembly using the supplied M6 carriage bolts, washers and nyloc nuts (Fig. 1) , the square block at the neck of the carriage bolt locates in the slot on the bracket (Fig. 2). The finished assembly is shown in Fig. 3.

2. Disconnect the negative battery terminal, drain water system and remove the top hose. Remove the original electric fan.

3. Remove the upper and lower radiator bolts that attach the radiator to the front apron/bulkhead.

4. Using the supplied metric or imperial bolts (depending on the fixings on the radiator), washers and spacers, mount the fan and bracket assembly to the original radiator mounting points (Fig. 4) using the longer pair of bolts in the top mountings, adjust the fan and bracket assembly to ensure the fan is running freely and there is no distortion of the fan shroud, then tighten all the nuts and bolts (Fig. 5).

5. Install the electronic fan controller into the top hose by cutting a 25mm section from a suitably straight section of hose and follow the separate EFC instructions supplied for controller, fan connections and set up. Refill the cooling and reconnect the battery.

Fig. 2

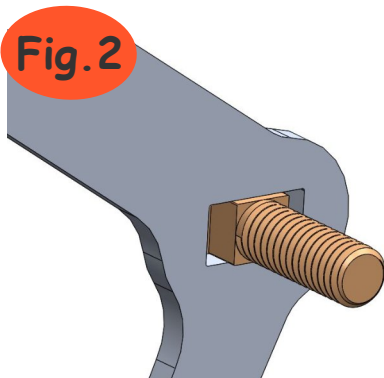


Fig. 3

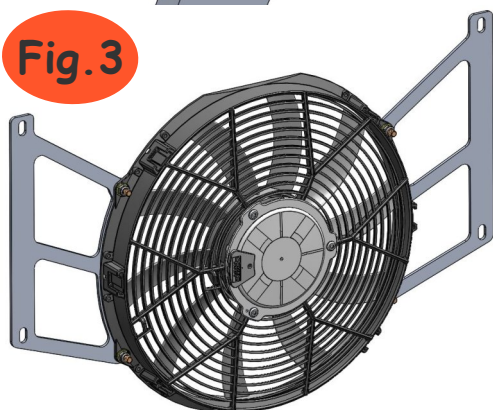


Fig. 5

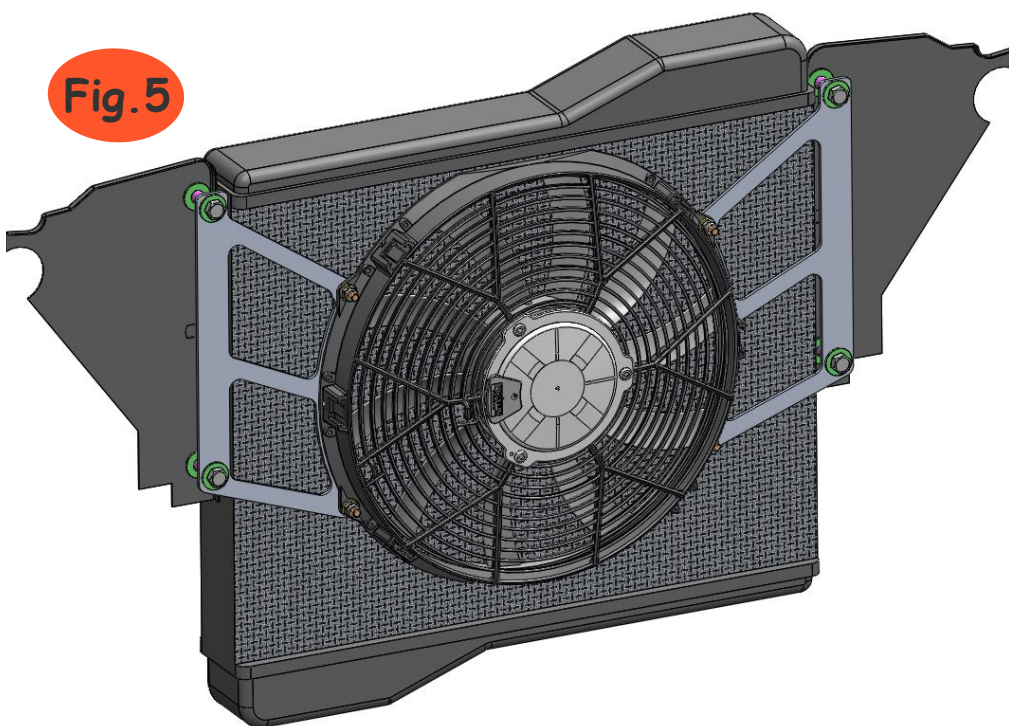


Fig. 4

