


## VERY IMPORTANT NOTE

This Revotec cooling kit has been engineered to provide perfect cooling for your TR4A. However it is essential that the other components in the cooling system are operating correctly.

### The following must be checked:

1. The radiator has a normal life expectancy of approximately 8-9 years, after this time it should be thoroughly assessed and any signs of deterioration, such as furring up internally or distortion, a replacement is recommended.
2. The radiator fins must be clear of all debris such as mud and leaves.
3. The system must be filled with the correct coolant.
4. The water pump and thermostat must be operating correctly.

fig. 1

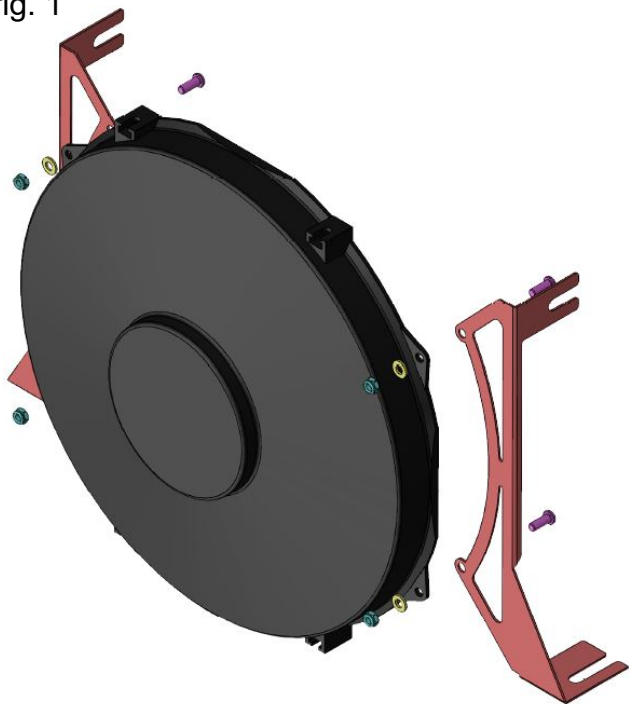

1. Disconnect +ve battery terminal, drain water system and remove the top and bottom hoses from the radiator. Remove the radiator from the car and place on a flat surface with the outlets pointing down.
2. Fit the brackets to the fan (fig. 1) Using the supplied dome head allen key bolts, the head of the bolts need to be pointing towards the radiator core side of the bracket (fig. 2)
3. Lay the fan and bracket assembly on the front of the radiator aligning the mounting points with the slots on the fan brackets (fig. 3) Carefully lift the fan and bracket assembly back into the car and refit all of the fixings making sure the fan is as close to the core as possible without being distorted.
4. Follow Electronic Fan Controller instructions for information on wiring and setup.

fig. 3

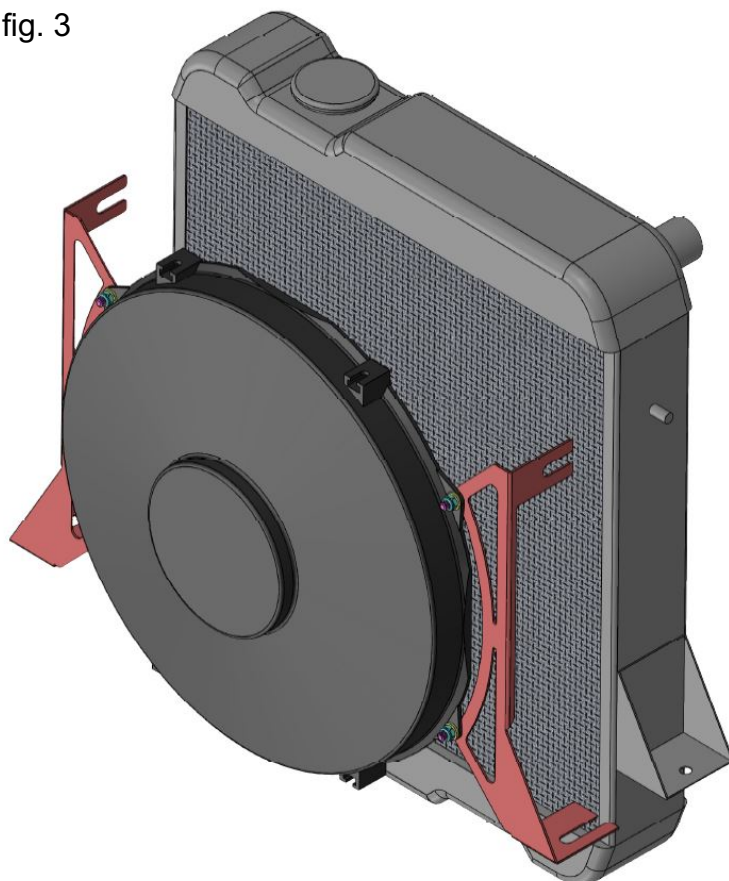


fig. 2

