

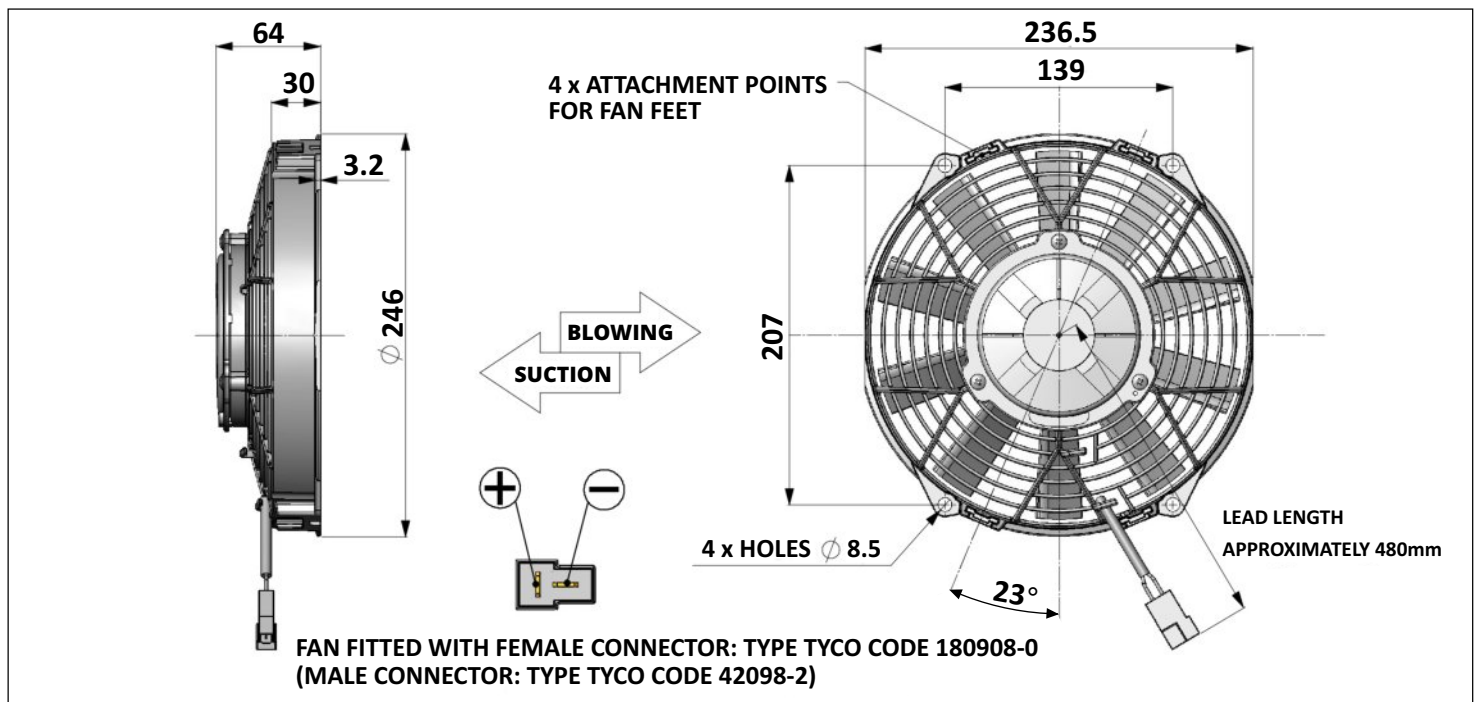
| 12V DC          |                         | 9" (225mm) Suction               |             |           | 9" (225mm) Blowing               |             |           |
|-----------------|-------------------------|----------------------------------|-------------|-----------|----------------------------------|-------------|-----------|
| Revotec part no |                         | FAN0605HP                        |             |           | FAN0610HP                        |             |           |
| Full COMEX code |                         | F26P-12E8105-40S<br>2700.0605.00 |             |           | F26P-12E8102-10B<br>2700.0610.00 |             |           |
| Fan shroud type |                         | F26P                             |             |           | F26P                             |             |           |
| Static pressure |                         | Suction                          |             |           | Blowing                          |             |           |
| Pa              | Inches H <sub>2</sub> O | Airflow m <sup>3</sup> /h        | Airflow cfm | Current A | Airflow m <sup>3</sup> /h        | Airflow cfm | Current A |
| 0               | 0                       | <b>1040</b>                      | 610         | 6.6       | <b>1240</b>                      | 730         | 9.5       |
| 25              | 0.1                     | <b>990</b>                       | 580         | 6.7       | <b>1150</b>                      | 680         | 9.5       |
| 50              | 0.2                     | <b>940</b>                       | 550         | 7.1       | <b>1060</b>                      | 630         | 9.4       |
| 75              | 0.3                     | <b>890</b>                       | 530         | 7.4       | <b>950</b>                       | 560         | 9.3       |
| 100             | 0.4                     | <b>830</b>                       | 490         | 7.5       | <b>820</b>                       | 480         | 9.2       |
| 125             | 0.5                     | <b>770</b>                       | 450         | 7.7       | <b>620</b>                       | 370         | 9.1       |
| 150             | 0.6                     | <b>700</b>                       | 410         | 7.8       | <b>500</b>                       | 300         | 9.3       |
| 175             | 0.7                     | <b>620</b>                       | 370         | 7.9       | <b>400</b>                       | 240         | 9.3       |
| 200             | 0.8                     | <b>540</b>                       | 320         | 8.0       | <b>270</b>                       | 160         | 9.5       |
| 250             | 1.0                     | <b>380</b>                       | 220         | 8.4       | <b>0</b>                         | 0           | 10.6      |
| 300             | 1.2                     | <b>240</b>                       | 140         | 8.7       |                                  |             |           |
| 350             | 1.4                     | <b>110</b>                       | 60          | 9.2       |                                  |             |           |
| 400             | 1.6                     | <b>0</b>                         | 0           | 9.5       |                                  |             |           |


Blowing  
(Straight blade)

Suction  
(Curved blade)

Test voltage 13.0 V DC

Weight 1.6 kg

3D model available email us: [sales@revotec.com](mailto:sales@revotec.com)


Notes: