


WeatherTech®

Seat Back Protector Installation Instructions

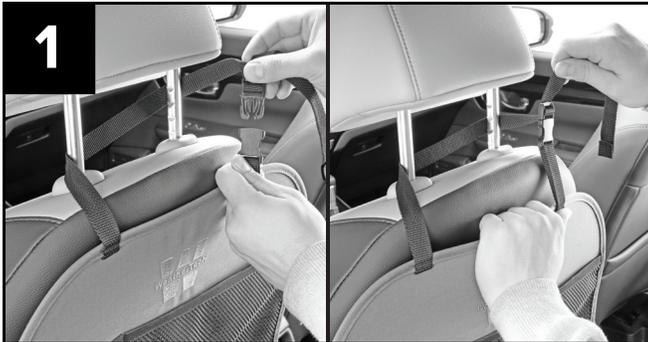

Hold the Seat Back Protector to the back of the desired seat. Pull the top straps around the headrest and connect the buckles.

NOTE: If seat is equipped with adjustable headrest, raise headrest and attach around support(s). Adjust strap to desired length.



Pull the lower straps around the lower portion of the backrest and connect the buckles. Adjust strap to the desired length.

NOTE: Pay close attention to the strap routing so they do not interfere with any seat airbag, latches or any other mechanisms.

CLEANING INSTRUCTIONS

1. Using a large commercial washer without agitator, wash the Seat Back Protector using 1/4 cup of a gentle detergent, without bleach, in cold water. Do not pour detergent directly onto the Seat Back Protector.
2. Rinse the Seat Back Protector twice (2X) to remove all of the detergent.
3. Hang and allow to air dry.

SPOT CLEANING:

1. Mix one ounce of a gentle detergent, without bleach, per quart of warm water.
2. Spray or sponge onto the Seat Back Protector.
3. Rinse with plain water (until no suds) and allow to air dry.

IMPORTANT:

DO NOT INSTALL THIS PRODUCT IN A MANNER THAT WILL INTERFERE WITH ANY VEHICLE OCCUPANT SAFETY SYSTEMS. THIS PRODUCT IS NOT DESIGNED TO RESTRAIN PETS, OCCUPANTS OR CARGO IN THE EVENT OF A COLLISION.

LET'S TALK

800-441-6287 or 630-769-1500

For warranty information, please visit www.WeatherTech.com/warranty